

# FLAT BONDING LEADS

## APPLICATIONS

### All electrical flexible connections :

- Contactors
- Disruptors
- Grounding leads
- Equipotential connections

## CHARACTERISTICS

High flexibility on the flat section in repeated flexus in width direction.

- Conductivity : 100% IACS

## COMPOSITION

- Flat braid made of 0.20mm copper and tin plated copper wires
- Tin plated copper pressed ferrule (squared)

## STANDARDS

- Copper wires according to NF EN 13602.

## VARIANTS

- Other constructions & design upon request
- Other wires  $\varnothing$  upon request
- PVC, elastomer, silicon insulation upon request
- Available with chamfered ferrule (diagram B)

## PACKAGING

- Cardboard boxes : 25 / 50 / 150 pieces



Diagram A

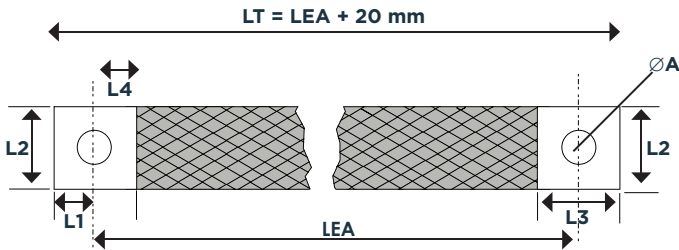


Diagram B

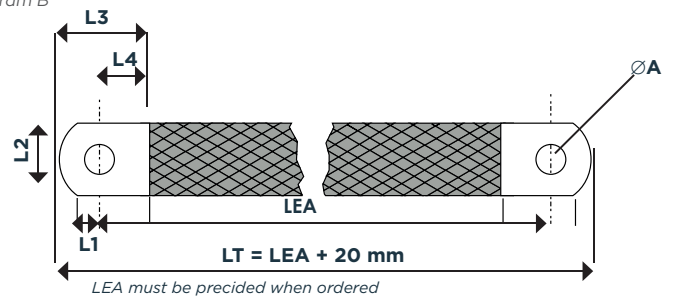


Diagram A

REF	Cross section mm <sup>2</sup>	L1 mm	L2 mm	L3 mm	L4 mm	Ø A mm
SLCE010-20	10	6	12	12	6	5.5 - 6,5
SLCE016-20	16	8	16	16	8	6.5 - 8.5 - 10.5
SLCE025-20	25	10	20	20	10	6.5 - 8.5 - 10.5
SLCE030-20	30	15	30	30	15	8.5 - 10.5
SLCE035-20	35	15	30	30	15	10.5 - 12.5

Diagram B

REF	Cross section mm <sup>2</sup>	L1 mm	L2 mm	L3 mm	L4 mm	Ø A mm
SLCE010-20	10	10	17	22	12	5.5 - 6,5
SLCE016-20	16	10	17	22	12	6.5 - 8.5 - 10.5
SLCE025-20	25	10	21	23	13	6.5 - 8.5 - 10.5
SLCE030-20	30	10	21	23	13	8.5 - 10.5
SLCE035-20	35	10	21	23	13	10.5 - 12.5