


TWIST SW-G RODENT REPELLENT

APPLICATIONS

- Protection for bundle cables
- Automotive / Railways
- Telecom industry

CHARACTERISTICS

- Rodent repellent
- Quick and easy place
- Self wrapping product
- Good abrasion resistance
- Vibrations protection
- Impacts protection
- Lightweight



COMPOSITION


- Monofilament (weft) PET
- Multifilaments (warp) Fiberglass

STANDARDS

- Flammability and Toxicity and harm from smoke : FMVS S302, D45-1333, PSA STE 96 230 915 99
- Flame test on single vertical insulated cable : NFC 32-070 C2, IEC 60332-1-1, IEC 60332-1-2
- European regulations

PACKAGING

Supplied in coils or cut pieces

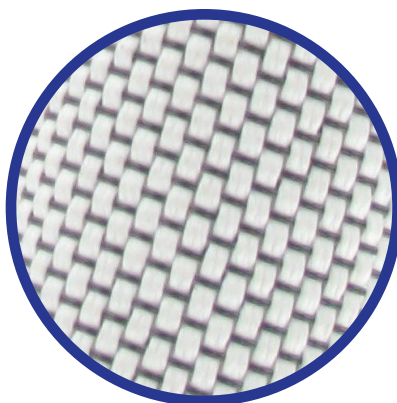

FEATURE		Value
Melting point		225°C
Continuous working temperature		de -70°C to +125°C
Moisture absorption		0.5% max
RoHS		Complies
Chemical	Micro-organism resistance	Very Good
	Acid resistance	Very Good
	UV and weather resistance	Very Good
	Solvent resistance	Very Good

Ref	Use *		Construction	Standard packaging
	Min (mm.)	Max (mm.)	Weight (g/m)	Spools (m.)
13	10	13	40	50
29	25	29	79	15

* Recommended range of use